


Typ / Type : Z 160 U		Art.-Nr. / Art.-No. : F05-16015	
U	230V (50Hz)	Δpfa min	– Pa
P1	0.21 kW	ΔI	– %
IN	0.9 A	IA / IN	1.6
n	2450 min-1		IP44
C400V	6 μF		01.009
tR	70 °C		8.0 kg



LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA2 [dB(A)] Gehäuse / casing	32	34	33	29	28	26	22
LWA5 [dB(A)] Ansaugseite / inlet side	35	37	35	34	30	29	24
LWA6 [dB(A)] Ausblasseite / outlet side	48	55	55	57	57	54	45

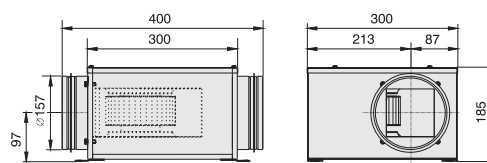