


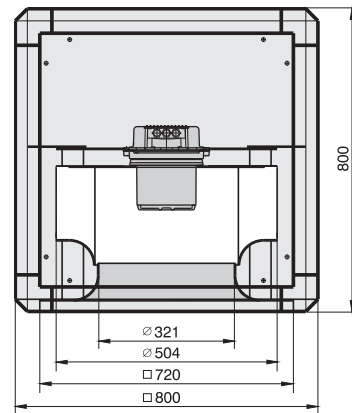


Typ / Type : UNO-80-500-G.6FF		Art.-Nr. / Art.-No. : F15-50010	
U	400V (50Hz)	Δp_{fa} min	-- Pa
P ₁	2.0 kW	ΔI	-- %
I _N	3.15 A	I _A / I _N	--
n	1500 min ⁻¹		IP54
C _{400V}	-- μ F		01.390
t _R	40 °C		84 kg

LWA _{rel} A-bewertet bei V=0,5*V _{max} LWA _{rel} A-weighted at V=0,5*V _{max}	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA ₂ [dB(A)] Gehäuse / casing	-3	-4	-13	-15	-18	-21	-23
LWA ₅ [dB(A)] Ansaugseite / inlet side	-19	-7	-6	-6	-8	-11	-20
LWA ₆ [dB(A)] Ausblasseite / outlet side	-20	-11	-8	-3	-9	-13	-22



Betriebsart / Operation mode
a) Steuerbetrieb / open-loop control

Betriebsart / Operation mode
b) Regelbetrieb / closed-loop control