


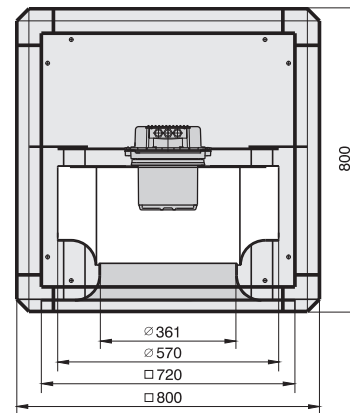


Typ / Type : UNO-80-560-G.61F		Art.-Nr. / Art.-No. : F15-56000	
U	400V (50Hz)	Δp_{fa} min	-- Pa
P ₁	2,55 kW	ΔI	-- %
I _N	4.0 A	I _A / I _N	--
n	1400 min-1		IP54
C _{400V}	-- μ F		01.390
t _R	40 °C		86 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA2 [dB(A)]	Gehäuse / casing	1	0	-16	-14	-18	-21	-27
LWA5 [dB(A)]	Ansaugseite / inlet side	-19	-7	-6	-6	-8	-11	-20
LWA6 [dB(A)]	Ausblasseite / outlet side	-20	-11	-8	-3	-9	-13	-22



Betriebsart / Operation mode
a) Steuerbetrieb / open-loop control

Betriebsart / Operation mode
b) Regelbetrieb / closed-loop control