


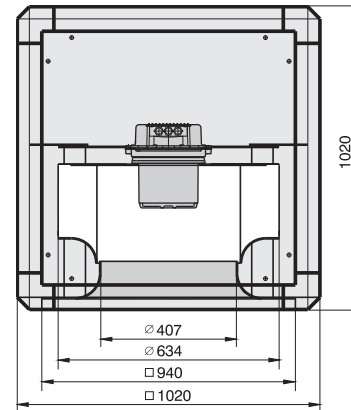


Typ / Type: UNO-102-630-G.61F		Art.-Nr. / Art.-No.: F15-63010	
U	400V (50Hz)	Δp_{fa} min	-- Pa
P ₁	2,45 kW	ΔI	-- %
I _N	3,8 A	I _A / I _N	--
n	1100 min ⁻¹		IP54
C _{400V}	-- μ F		01.390
t _R	40 °C		102 kg

LWA _{rel} A-bewertet bei V=0,5*V _{max} LWA _{rel} A-weighted at V=0,5*V _{max}	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA ₂ [dB(A)] Gehäuse / casing	-4	-6	-9	-10	-13	-13	-18
LWA ₅ [dB(A)] Ansaugseite / inlet side	-16	-11	-5	-4	-9	-14	-23
LWA ₆ [dB(A)] Ausblasseite / outlet side	-13	-6	-8	-5	-8	-13	-20



Betriebsart / Operation mode
a) Steuerbetrieb / open-loop control

Betriebsart / Operation mode
b) Regelbetrieb / closed-loop control