


Typ / Type : DV/DH 190-2 E		Art.-No. : A00-19000 / A10-19000	
U	230V (50Hz)	Δpfa min	-- Pa
P ₁	0.07 kW	ΔI	-- %
I _N	0.30 A	I _A / I _N	1.4
n	2420 min ⁻¹	▲	IP44
C _{400V}	2 μF	★	01.009
t _R	60 °C	■	3,8 kg

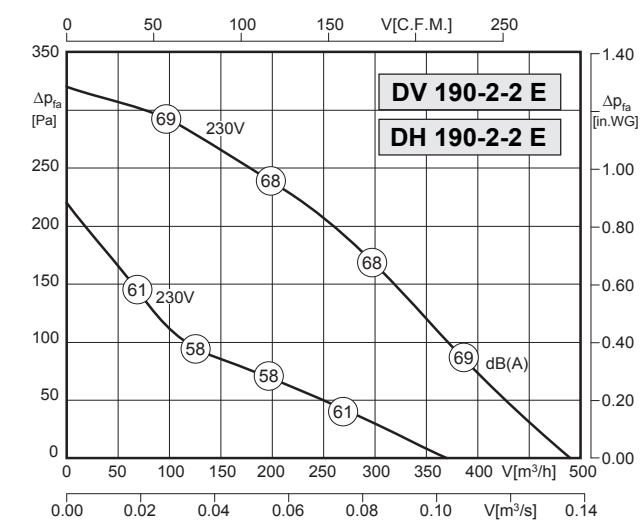

Typ / Type : DV/DH 190-2-2 E		Art.-No. : A00-19003 / A00-19003	
U	230V (50Hz)	Δpfa min	-- Pa
P ₁	0.07/0.04 kW	ΔI	-- %
I _N	0.3/0.2 A	I _A / I _N	1.4
n	2420/1520 min ⁻¹	▲	IP44
C _{400V}	2 μF	★	01.020
t _R	60 °C	■	3,8 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-22	-11	-7	-7	-11	-13	-18
LWA6 [dB(A)]	Ausblasseite / outlet side	-22	-9	-6	-6	-6	-11	-15

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-22	-11	-7	-7	-11	-13	-18
LWA6 [dB(A)]	Ausblasseite / outlet side	-22	-9	-6	-6	-6	-11	-15

