


Typ / Type : DV/DH 450-4 E		Art.-No. : A00-45000 / A10-45000	
U	230V (50Hz)	Δpfa min	- Pa
P <sub>1</sub>	0.80 kW	ΔI	2 %
I <sub>N</sub>	3.74 A	I <sub>A</sub> / I <sub>N</sub>	2.0
n	1240 min <sup>-1</sup>	▲	IP54
C <sub>400V</sub>	16 μF	★	01.024
t <sub>R</sub>	50 °C	■	29 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

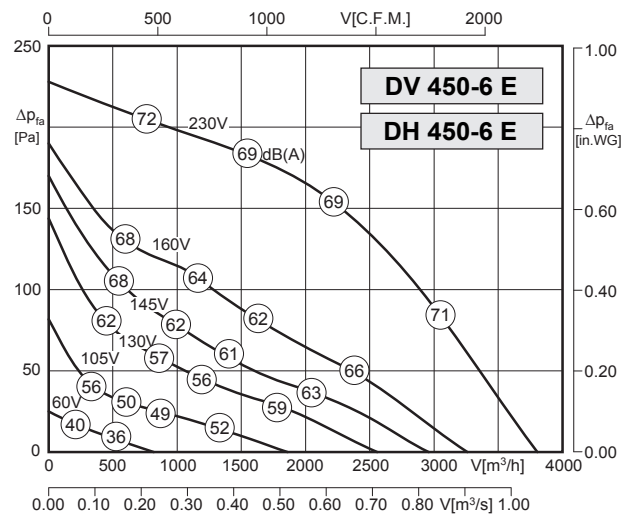

Typ / Type : DV/DH 450-6 E		Art.-No. : A00-45003 / A10-45003	
U	230V (50Hz)	Δpfa min	- Pa
P <sub>1</sub>	0.27 kW	ΔI	- %
I <sub>N</sub>	1.2 A	I <sub>A</sub> / I <sub>N</sub>	1.8
n	860 min <sup>-1</sup>	▲	IP54
C <sub>400V</sub>	5 μF	★	01.024
t <sub>R</sub>	50 °C	■	26 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

