


Typ / Type : DVW 800-6 KD		Art.-Nr. / Art.-No. : A26-80001	
U	400V (50Hz)	$\Delta p_{fa}$ min	-- Pa
P <sub>1</sub>	3.35 kW	$\Delta I$	-- %
I <sub>N</sub>	6.70 A	I <sub>A</sub> / I <sub>N</sub>	2.9
n	830 min <sup>-1</sup>		IP54
C <sub>400V</sub>	-- μF		01.006
t <sub>R</sub>	40 °C		164 kg

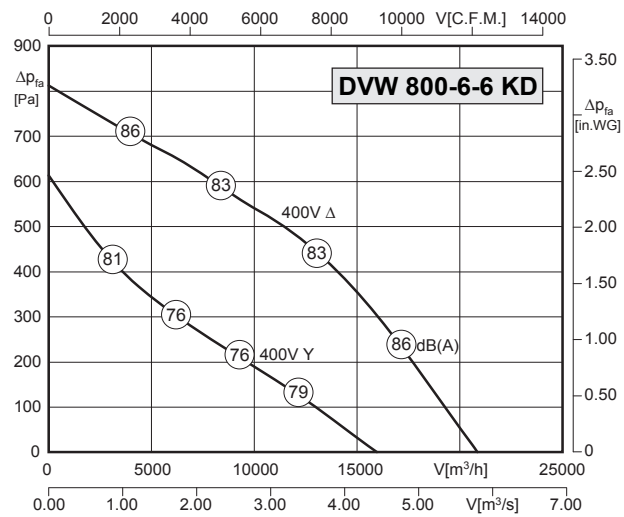

Typ / Type : DVW 800-6-6 KD		Art.-Nr. / Art.-No. : A26-80000	
U	400V (50Hz)	$\Delta p_{fa}$ min	-- Pa
P <sub>1</sub>	3.35/1.7 kW	$\Delta I$	-- %
I <sub>N</sub>	6.7/3.3 A	I <sub>A</sub> / I <sub>N</sub>	2.9
n	830/595 min <sup>-1</sup>		IP54
C <sub>400V</sub>	-- μF		01.045
t <sub>R</sub>	40 °C		164 kg

LWArel A-bewertet bei V=0,5*Vmax		fM [Hz]						
LWArel A-weighted at V=0,5*Vmax		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-16	-13	-12	-8	-11	-17	-25
LWA6 [dB(A)]	Ausblasseite / outlet side	-13	-9	-8	-5	-9	-18	-26

LWArel A-bewertet bei V=0,5*Vmax		fM [Hz]						
LWArel A-weighted at V=0,5*Vmax		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-16	-13	-12	-8	-11	-17	-25
LWA6 [dB(A)]	Ausblasseite / outlet side	-13	-9	-8	-5	-9	-18	-26

- U<sub>1</sub> braun / brown
- V<sub>1</sub> blau / blue
- W<sub>1</sub> schwarz / black
- U<sub>2</sub> rot / red
- V<sub>2</sub> grau / grey
- W<sub>2</sub> orange / orange
- TB weiß / white
- PE gelb-grün / yellow-green

