


Typ / Type : DVW/DHW 450-4 E		Art.-No. : A26-45009 / A36-45009	
U	230V (50Hz)	Δp_{fa} min	- Pa
P ₁	0.84 kW	ΔI	9 %
I _N	3.7 A	I _A / I _N	2.4
n	1210 min ⁻¹		IP54
C _{400V}	16 μ F		01.024
t _R	40 °C		29 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

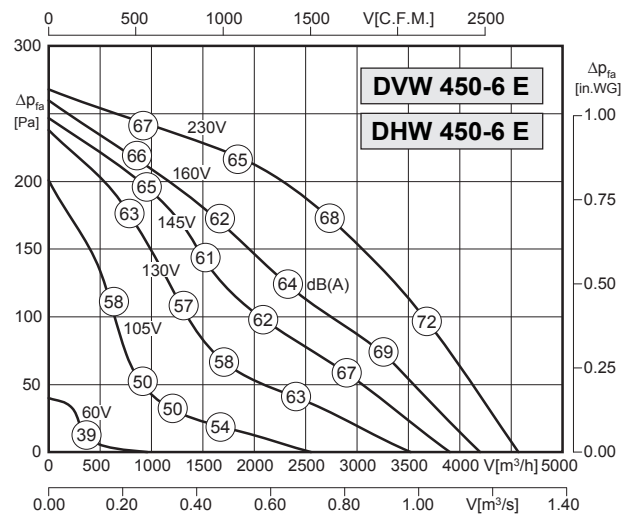

Typ / Type : DVW/DHW 450-6 E		Art.-No. : A26-45012 / A36-45012	
U	230V (50Hz)	Δp_{fa} min	- Pa
P ₁	0.37 kW	ΔI	23 %
I _N	1.9 A	I _A / I _N	2.4
n	910 min ⁻¹		IP54
C _{400V}	6 μ F		01.024
t _R	40 °C		27 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

