


Type : DVW/DHW 450-6 D		Art.-No. : A26-45063 / A36-45063	
U	400V (50Hz)	Δp_{fa} min	-- Pa
P ₁	0.31 kW	ΔI	-- %
I _N	0.64 A	I _A / I _N	2.6
n	880 min ⁻¹		IP54
C _{400V}	16 μ F		01.006
t _R	70 °C		26 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

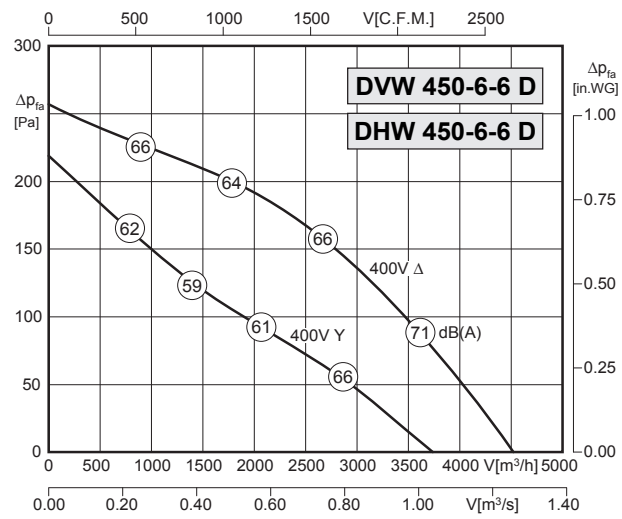

Type : DVW/DHW 450-6-6 D		Art.-No. : A26-45069 / A36-45069	
U	400V (50Hz)	Δp_{fa} min	-- Pa
P ₁	0.31/0.2 kW	ΔI	-- %
I _N	0.64/0.34 A	I _A / I _N	2.6
n	880/675 min ⁻¹		IP54
C _{400V}	-- μ F		01.045
t _R	70 °C		26 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

