


Typ / Type : <b>EHAD 315-2</b>		Art.-Nr. / Art.-No. : <b>B30-31551</b>	
U	400V (50Hz)	Δp <sub>fa</sub> min	- Pa
P <sub>1</sub>	1,9 kW	ΔI	- %
I <sub>N</sub>	3.4 A	I <sub>A</sub> / I <sub>N</sub>	2.9
n	2600 min <sup>-1</sup>	▲	IP54
C <sub>400V</sub>	- μF	★	01.006
t <sub>R</sub>	50 °C	■	32 kg



Typ / Type : <b>EHAE 315-4</b>		Art.-Nr. / Art.-No. : <b>B30-31500</b>	
U	230V (50Hz)	Δp <sub>fa</sub> min	- Pa
P <sub>1</sub>	0.29 kW	ΔI	- %
I <sub>N</sub>	1.3 A	I <sub>A</sub> / I <sub>N</sub>	1.8
n	1270 min <sup>-1</sup>	▲	IP54
C <sub>400V</sub>	6 μF	★	01.024
t <sub>R</sub>	50 °C	■	22 kg

LWA <sub>rel</sub> A-bewertet bei V=0,5*V <sub>max</sub> LWA <sub>rel</sub> A-weighted at V=0,5*V <sub>max</sub>	fM [Hz]						
	125	250	500	1K	2K	4K	8K
Ausblasseite 4-polig / outlet side 4-pole	-19	-6	-6	-5	-8	-18	-25
Ansaugseite 4-polig / inlet side 4-pole	-18	-8	0	-6	-6	-12	-21
Ausblasseite 2-polig / outlet side 2-pole	-21	-9	-2	-8	-12	-18	-25
Ansaugseite 2-polig / inlet side 2-pole	-13	-7	-5	-7	-8	-12	-18

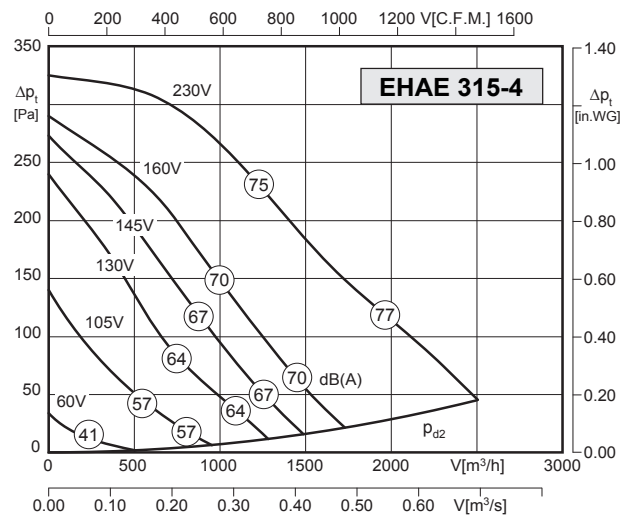