


Typ / Type : DRAE 240-4		Art.-Nr. / Art.-No. : C00-24000	
U	230V (50Hz)	Δp _{fa} min	100 Pa
P ₁	0.5 kW	ΔI	– %
I _N	2.2 A	I _A / I _N	1.3
n	950 min ⁻¹	▲	IP54
C _{400V}	10 μF	★	01.025
t _R	40 °C	■	15 kg



Typ / Type : DRAD 240-4		Art.-Nr. / Art.-No. : C00-24040	
U	400V (50Hz)	Δp _{fa} min	200 Pa
P ₁	0.47 kW	ΔI	– %
I _N	1.0 A	I _A / I _N	3.6
n	1150 min ⁻¹	▲	IP54
C _{400V}	– μF	★	01.006
t _R	40 °C	■	13 kg

LWA _{rel} A-bewertet bei V=0,5*V _{max} LWA _{rel} A-weighted at V=0,5*V _{max}	fM [Hz]						
	125	250	500	1K	2K	4K	8K
Ausblasseite 4-polig / outlet side 4-pole	-22	-13	-7	-4	-7	-9	-17
Ansaugseite 4-polig / inlet side 4-pole	-18	-10	-8	-5	-6	-9	-15

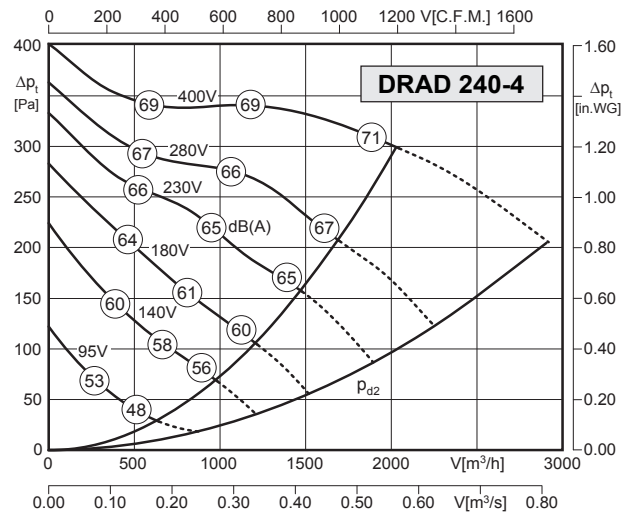