


Typ / Type : DRAE 279-4		Art.-Nr. / Art.-No. : C00-27900	
U	230V (50Hz)	Δp_{fa} min	140 Pa
P ₁	1.55 kW	ΔI	– %
I _N	6.5 A	I _A / I _N	1.7
n	1110 min ⁻¹		IP54
C _{400V}	25 μ F		01.025
t _R	40 °C		28 kg



Typ / Type : DRAD 279-4		Art.-Nr. / Art.-No. : C00-27940	
U	400V (50Hz)	Δp_{fa} min	– Pa
P ₁	1.8 kW	ΔI	– %
I _N	3.45 A	I _A / I _N	2.7
n	1180 min ⁻¹		IP54
C _{400V}	– μ F		01.006
t _R	50 °C		27 kg

LWA _{rel} A-bewertet bei V=0,5*V _{max} LWA _{rel} A-weighted at V=0,5*V _{max}	fM [Hz]						
	125	250	500	1K	2K	4K	8K
Ausblasseite 4-polig / outlet side 4-pole	-22	-13	-7	-4	-7	-9	-17
Ansaugseite 4-polig / inlet side 4-pole	-18	-10	-8	-5	-6	-9	-15

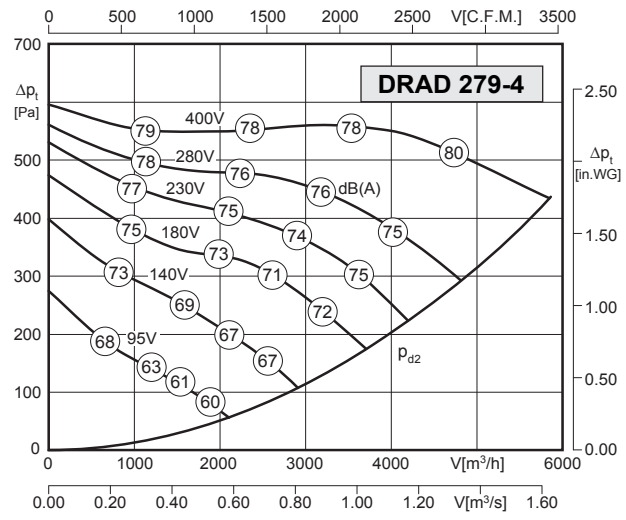